

511, 923

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 November 2003 (06.11.2003)

PCT

(10) International Publication Number  
**WO 03/092324 A1**


- (51) International Patent Classification<sup>7</sup>: **H04R 9/06, 7/12**
- (21) International Application Number: **PCT/IB03/01845**
- (22) International Filing Date: **25 April 2003 (25.04.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
**02076651.5**                      **25 April 2002 (25.04.2002)**    **EP**
- (71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**;  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **D'HOOGH, Guido, O., M. [BE/BE]**; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: **SCHRIJNEMAEEKERS, Hubert, J., M.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**  
— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: LOUDSPEAKER WITH A FIRST AND A SECOND DIAPHRAGM BODY

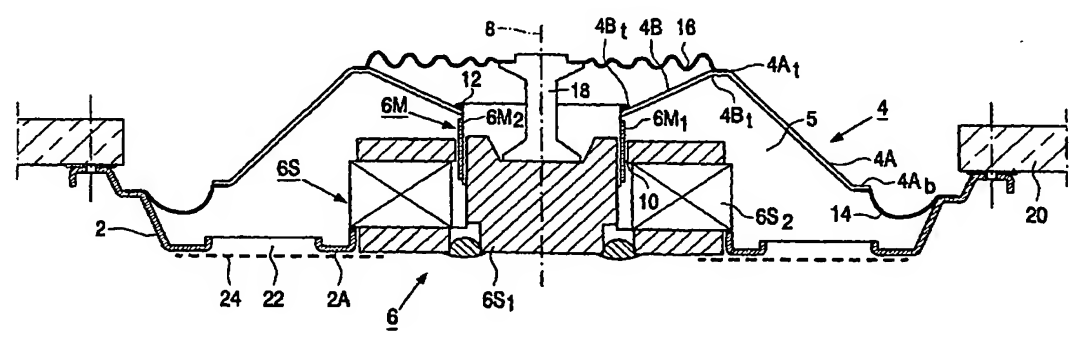

(57) **Abstract:** Loudspeaker provided with a frame (2), a diaphragm (4) and an electric driving means for moving the diaphragm along an axis of translation (8) with respect to the frame. The diaphragm runs round the axis of translation and includes an outer conical first diaphragm body (4A) and an inner conical second diaphragm body (4B) which is invertedly oriented with respect to and positioned inside the first diaphragm body. These bodies each have a base portion and a top portion, the top portion (4At) of the first diaphragm body and the base portion (4Bb) of the second diaphragm body being interconnected. The diaphragm is suspended from the frame through a first flexible suspension means (14) extending between the base portion (4Ab) of the first diaphragm body and the frame and through a second flexible suspension means (16) extending between the top portion (4Bt) of the second diaphragm body and a movable part (6M) of the driving means. Due to this suspension arrangement in combination with the specific form of the diaphragm a very small height of the loudspeaker is within reach.



**WO 03/092324 A1**